

Nickel Plated Brass Compression Glands (PG):

Description:

Our Nickel Plated compression glands are suitable for applications in machines and devices where a higher temperature rating is required.

Available in a full range of PG sizes, Metric sizes also available.

Supplied complete with Nickel Plated locknut.


Technical Specification:

Material: Gland: Nickel Plated Brass
Seal: NBR Rubber
O-Ring: EPDM Rubber

Standard: Manufactured to EN 50262.

Temperature Rating: -40°C to +100°C
(120°C Instantaneous)

Ingress Protection: IP68 Rating
(150PSI)

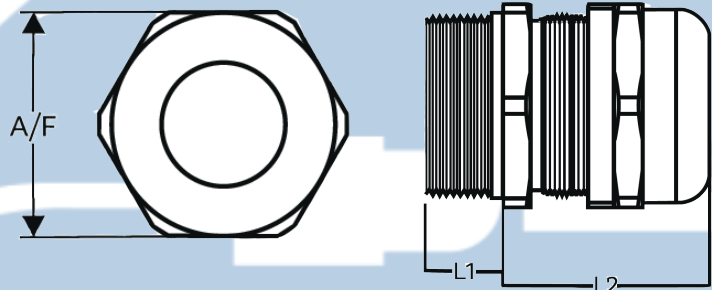

Dimensions:

Product Code	Thread Size	Cable Ø Range	Length (L1)	Length (L2)	A/F
PG7-NP	PG7	2.0-5.0	5.0	24.0	14.0
PG9-NP	PG9	4.0-8.0	6.0	27.0	17.0
PG11-NP	PG11	5.0-10.0	6.0	28.0	20.0
PG13.5-NP	PG13.5	6.0-12.0	6.5	29.5	22.5
PG16-NP	PG16	10.0-14.0	6.5	30.2	24.5
PG21-NP	PG21	13.0-18.0	7.0	32.0	30.0
PG29-NP	PG29	18.0-25.0	8.0	39.0	40.0
PG36-NP	PG36	22.0-32.0	8.0	45.0	50.0

All dimensions and sizes are displayed in millimetres unless otherwise stated.