

Rotary Isolators:

Description:

Our own brand 3 phase and Neutral rotary isolators are available from 20A all the way up to 100A. Lockable in the isolated position for safety whilst performing maintenance. Inner workings accessible by a 2 screw cover.

Supplied with metric 20mm or 25mm knockouts depending on the size. Suitable for use with AC current only.

Technical Specification:

Number of Poles: 4


Mounting Style: Surface mounted.

Ingress Protection: IP65

Current Rating: AC-23A

Voltage Rating: 415V

Specifications: BS EN60947 Compliant

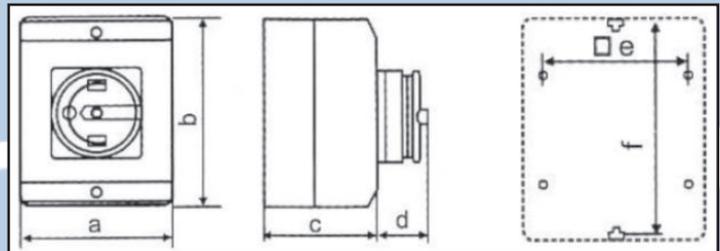

Dimensions:

Product Code	Rating	Power Rating	Knockout Sizes	a	b	c	d	e	f
E204PS	20A	4KW	M20	80	100	67	35	60	92
EMAX204PS	20A	4KW	M20	100	125	81	35	80	115
ELARGE204	20A	4KW	M20	115	173	84	35	90	165
E324PS	32A	11KW	M20	100	125	81	35	80	115
E404PS	40A	15KW	M20	100	125	81	35	80	115
E634PS	63A	22KW	M25	118	173	84	35	90	165
E1004PS	100A	32KW	M25	160	240	120	43	142	193

All dimensions and sizes are displayed in millimetres unless otherwise stated.

