

Nickel Plated Brass Compression Glands (Metric):

Description:

Our Nickel Plated compression glands are suitable for applications in machines and devices where a higher temperature rating is required.

Available in a full range of Metric sizes, PG sizes also available.

Supplied complete with Nickel Plated locknut.


Technical Specification:

Material: Gland: Nickel Plated Brass
Seal: NBR Rubber
O-Ring: EPDM Rubber

Standard: Manufactured to EN 50262.

Temperature Rating: -40°C to +100°C
(120°C Instantaneous)

Ingress Protection: IP68 Rating
(150PSI)

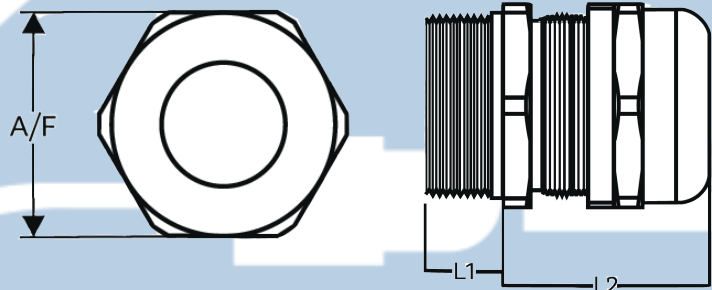

Dimensions:

Product Code	Thread Size	Cable Ø Range	Length (L1)	Length (L2)	A/F
M12-NP	M12	3.0-8.0	5.0	21.0	17.0
M16-NP	M16	5.0-11.0	5.0	25.0	20.0
M20-NP	M20	6.0-14.0	6.0	29.0	24.0
M25-NP	M25	12.0-20.0	7.0	29.0	30.0
M32-NP	M32	16.0-25.0	8.0	32.0	36.0
M40-NP	M40	21.0-32.0	9.0	35.0	45.0
M50-NP	M50	32.0-42.0	9.0	35.0	56.5
M63-NP	M63	42.0-54.0	10.0	38.0	68.0

All dimensions and sizes are displayed in millimetres unless otherwise stated.